
Chey's

2012 MODELS

# FILUMFIGHT.

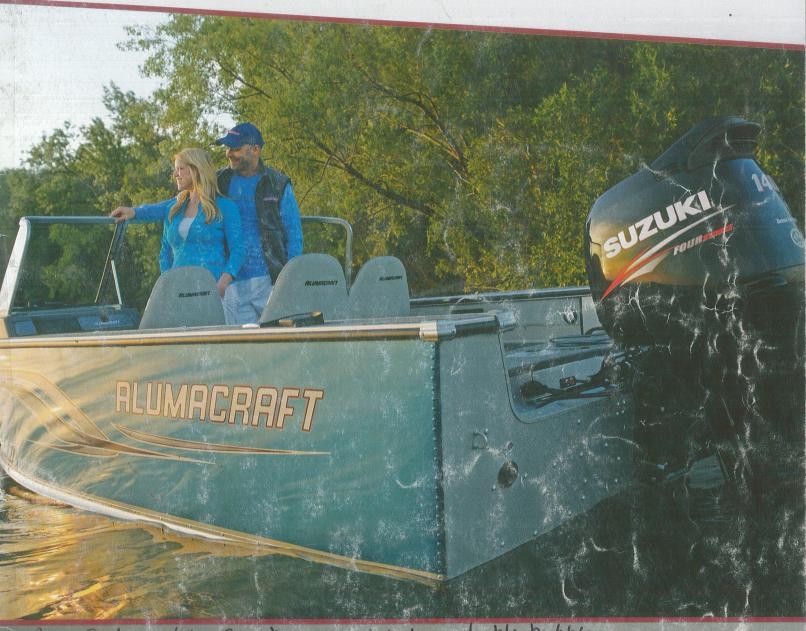

Any Spt models can be converted to a double bubble. Celebrating a

TRADITION of EXCELLENCE

### COMPETITIVE DIFFERENCE

# Better BUILT

Can a boat be tough but agile? Strong but light on its feet?
It can if it's an Alumacraft.

Full-length double plating means twice the strength and protection all the way to the transom—without compromising agility. Compare our twin-plated 2XB hull models against competing boats that have at best only twin-plating in the bow.




One-piece, single-sheet aluminum finely cut and shaped for the greatest possible inherent strength




Top-quality aluminum hulls with larger aircraft-grade rivets for longevity



Durable wood-free, heavy-gauge aluminum seating and stringers




Twin-plated 2XB hulls provide



A sustainable and larger, one-piece, hardened heavy-duty keel



Full-length, oversized spray rails for a drier ride in rough water



Water-tested hulls ensure rivet and weld integrity



Gas-resistant expansion foam increases buoyancy and quiets the ride



Convenient wood-free storage and livewell compartment hatches




The highest quality marine-grade plywood and carpeted decks



Automotive-grade base/clear coat paint with top-quality graphics



Quality fit and finish from bow to stern for practicality and appeal

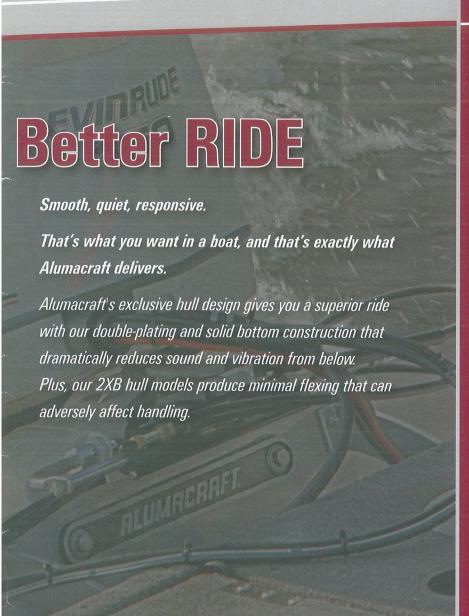

### Better VALUE

What do you get when you combine a better build with a better ride?

Better value.

Only Alumacraft has a decades-long reputation for delivering a hull you can count on, a ride you can groove on, and a price you can bank on.

### **TABLE OF CONTENTS**

TROPHY SERIES (175, 185 & 205)	
175	
	5
<b>DOMINATOR SERIES</b> (165, 175 & 185)	
175	6
185	7
<b>COMPETITOR SERIES</b> (165, 175 & 185)	
175, 185	8
165	9
NAVIGATOR SERIES (165, 175)	
165	10
175	
CLASSIC SERIES (165)	
165 TILLER	12
165 CS	
LUNKER: & FISHERMAN	
FISHERMAN 145 TILLER, 160's	1/1
LUNKER II	15
5/110E5, 1 5 G 1 5	16 - 17
PRO PACKAGES (165, 175 & 185)	
PRO 165	18
PRO 185	19
CRAPPIES (JON & DELUXE)	
CRAPPIE JON	20
PF PACKAGES	
PF 175	21
18' - 20' ALL WELDS	
MV 1860 CC	22
15' - 17' ALL WELDS	
WATERFOWLER 16	24
	25
RIVETED JONS	26
	26 27

### What's this?

Every page of our brochure has a unique code that you can scan with your smartphone to watch a video. You can download the free app @ http://gettag.mobi, or go to the App Store on iPhone and look for the Microsoft





### TROPHY

A mix of serious fishing and serious family fun, the Trophy offers plenty of storage for all your kids' gear, plus optional bow rod storage and two large livewells to make it a great tournament boat. All with a smooth ride that blows the competition out of the water.



WATCH THE TROPHY VIDEO: SCAN THE TAG CODE WITH YOUR SMART PHONE

### STANDARD FEATURES

Hydraulic Steering, Convertible High-Rise Top with Boot, Quick-Disconnect Hardware, Lockable 8' Rod Compartment, Lockable Glove Box, Dual Livewells, Lockable Dry Storage (205, 195, 185), Battery Storage (3 Batteries), Master Electrical Switch, One Power Point, Circuit Breakers, Trolling Systems - 12/24V Bow Outlet, Stowable Running Lights, 2 Interior Courtesy Lights, Livewell Lights, Bilge Pumps - Dual, Automatic & Manual (205, 195, 185), Manual (175), Fire Extinguisher, Grab Handles, Cup Holders, Flush Mount Cleats (205, 195, 185)

### **OPTIONAL EQUIPMENT**

Trolling Motor, Graph (Minn Kota, Lowrance, Humminbird), Bow Rod Storage: 8 Rods (205, 195, 185 = four 8' & four  $6^{1/2'}$  Rods), (175 = four  $7^{1/2}$  & four  $6^{1/2}$ ), Vinyl Floor, Extra Seat & Pedestal, Bow Cushions, Mooring, Snap Covers, Side, Aft & Walkway Curtain, Captain's Chair, Top Set Hider, Sport Steering Wheel

### **COLOR OPTIONS**

Olympic White





	TROPHY 205	TROPHY 195	TROPHY 185	TROPHY 175
LENGTH	20'8" (6.2 m)	19'8" (5.9 m)	18'8" (5.6 m)	17'8" (5.3 m)
	98" (2.4 m)	98" (2.4 m)	98" (2.4 m)	94" (2.4 m)
BEAM	47/27" (1.2 m/.69 m)	47/27" (1.2 m/.69 m)	47/27" (1.2 m/.69 m)	43"/25" (1.1 m/.64 m)
DEPTH: Max./to Floor	96"/25" (2.45 m/.64 m)	96"/25" (2.45 m/.64 m)	96"/25" (2.45 m/.64 m)	94"/25" (2.45 m/.64 m)
TRANSOM: Width/Height	# 100 CO   1	200 hp (149 kw)	175 hp (130 kw)	150 hp (111 kw)
HORSEPOWER: Max.	225 hp (167 kw)	AND DESCRIPTION OF THE PROPERTY OF THE PROPERT	8/1760 lbs. (8/798 kg)	7/1600 lbs. (7/725 kg)
CAPACITY: Max. Persons	9/2350 lbs. (9/1066 kg)	8/2000 lbs. (8/907 kg)		1550 lbs. (703 kg)
WEIGHT	1915 lbs. (868 kg)	1805 lbs. (818 kg)	1780 lbs. (807 kg)	
FUEL CAPACITY	45 gal. (170 L)	35 gal. (132 L)	35 gal. (132 L)	35 gal. (132 L)
2XB BOW THICKNESS	.200 (5.08 mm)	.200 (5.08 mm)	.200 (5.08 mm)	.160 (4.06 mm)
2XB HULL	.200 (5.08 mm)	,200 (5.08 mm)	.200 (5.08 mm)	.160 (4.06 mm)
HULL SIDE THICKNESS	.080 (2.03 mm)	.080 (2.03 mm)	.080 (2.03 mm)	.080 (2.03 mm)
	4	4	3	3
SEATS*		2	2	2
JUMP SEATS	2		22 gal. (83.3 L)	22 gal. (83.3 L)
LIVEWELL: Bow**	22 gal. (83.3 L)	22 gal. (83.3 L)		21 gal. (79 L)
LIVEWELL: Aft***	21 gal. (79 L)	21 gal. (79 L)	21 gal. (79 L)	
STEERING	hydraulic	hydraulic	hydraulic	hydraulic
INSTRUMENTATION	NEW! Multi-function gauges -	- speedometer, tachometer, voltmet	er, fuel gauge, horn	
STEREO	AM/FM/MP3 docking station	with 2 speakers	<i>y</i>	

\*\* Agrated, bow insulated, bait systems, timers, light, remote drain (20" W x 10.5" H x 31.5" L / 55.9 cm x 26.7 cm x 80 cm)

\*\* Agrated, bow insulated, bait systems, timers, light, remote drain (13" W x 11." H x 36" L / 33 cm x 27.9 cm x 91.4 cm)













TROPHY 185



TROPHY 175

### DOMINATOR

The Dominator has just the right size, features and convenient layout you need for serious sport or weekend play. Rear jump seats, dual livewells and a wide beam make this model a star of the Alumacraft fleet.



### SCAN THE TAG CODE WITH YOUR SMART PHONE STANDARD FEATURES

WATCH THE DOMINATOR VIDEO-

Hydraulic Steering 185's & 175's only, Lockable Rod Storage (Min. of 13 Rods up to 8'), Lockable Glove Box Sport, Dual Livewells, Lockable 22 Gal. Dry Storage (185, 175), Battery Storage (3 Batteries), Electrical Circuit Breakers, Trolling Systems 12/24V Bow Outlet, Stowable Running Lights, Interior Courtesy Lights, Livewell Lights, 1 Manual Bilge Pump, Fire Extinguisher, **Grab Handles** 

### **OPTIONAL EQUIPMENT**

Trolling Motor, Graph (Minn Kota, Lowrance, Humminbird), Dual Bubble Windshield (Sports Only), Vinyl Floor, Stereo, Extra Seat, Mooring, Snap Covers, Captain's Chair, Sport Steering Wheel

### **COLOR OPTIONS**







Canyon Red

LENG

BEAM DEPT

TRAN

HORS

CAPA

WEIG FUEL

2XB E

2XB F

HULL

SEATS JUMP

LIVEY LIVEV STEEF

INSTI

### **Rod Storage**

	DOMINATUR 185 SPURT/CS	DUMINATUR 175 SPURT/CS	DOMINATOR 165 SPORT/CS
iTH .	18'9" (5.7 m)	17'9" (5.4 m)	16'8" (5.0 m)
VI	94" (5.71 m)	94" (5.71 m)	91" (2.31 m)
TH: Max./to Floor	43"/23" (1.09 m/.58 m)	43"/23" (1.09 m/.58 m)	42"/22" (1.06 m/.56 m)
NSOM: Width/Height	94"/25" (2.39 m/.63 m)	94"/25" (2.39 m/.63 m)	91"/20" (2.31 m/.51 m)
SEPOWER: Max.	150 hp (111 kw)	150 hp (111 kw)	90 hp (67 kw)
ACITY: Max. persons	6/1600 lbs. (6/726 kg)	6/1370 lbs. (6/621 kg)	6/1100 lbs. (5/498 kg)
SHT	1530 lbs. (694 kg)	1482 lbs. (672 kg)	1250 lbs. (567 kg)
CAPACITY	35 gal. (132 L)	35 gal. (132 L)	19 gal. (71 L)
BOW	.160 (4.06 mm)	.160 (4.06 mm)	.160 (4.06 mm)
HULL: Aft (185's, 175's)	.160 (4.06 mm)	.160 (4.06 mm)	.080 (2.03 mm)
. THICKNESS: Side	.080 (2.03 mm)	.080 (2.03 mm)	.080 (2.03 mm)
'S*	3	2	2
P SEATS	2	2	2
WELL: Bow**	22 gal. (83.3 L)	22 gal. (83.3 L)	22 gal. (83.3 L)
WELL: Aft***	13 gal. (49.21 L)	13 gal. (49.21 L)	13 gal. (49.21 L)
RING	hydraulic	hydraulic	no feedback
RUMENTATION	NEW! Multi-function gauges — speedor	neter, tachometer, voltmeter, fuel gauge, horn	
EO	optional	optional	optional

\* Driver's is stationary with slider, height adjust

**Sport Wheel** 

\*\* Aerated, bait systems, light, remote drain bow only (20" W x 10.5" H x 31.5" L / 55.9 cm x 26.7 cm x 80 cm) \*\*\* Aerated, bow insulated, bait systems, timers, light, remote drain (12" W x 9" H x 30" L / 30.48 cm x 22.86 cm x 76.2 cm)





165 CS



165 Sport



175 CS



175 Sport



185 CS



185 Sport


المن المن

2019 Tomp 165 53 Because of a LiD

Sport

Several model options make it easy to choose just the right Competitor for your family. Loads of storage, dual tournament-size livewells, bow rod storage, dual side rod storage, and proven performance make this boat the best in its class.

### 175 & 185 Tiller

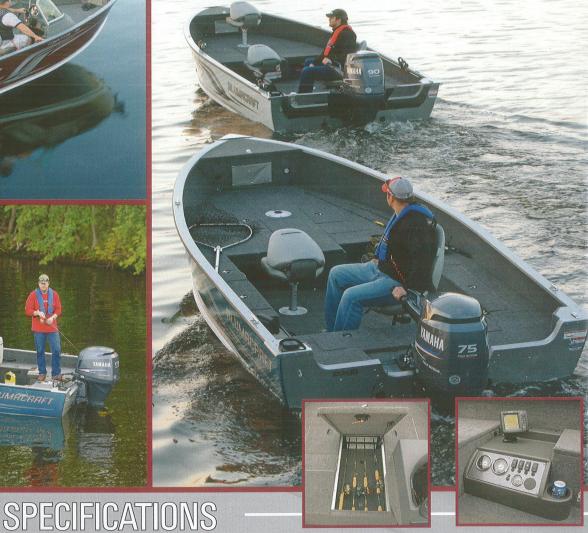

WATCH THE COMPETITOR VIDEO: SCAN THE TAG CODE WITH YOUR SMART PHONE

175 Sport

### STANDARD FEATURES

Hydraulic Steering (185's & 175's only), Lockable Rod Storage (Min. of 12 Rods up to 8'- 185's & 175's only, four up to 7' & four up to 6' on 165's), Lockable Glove Box (Sport Only), Dual Livewells, Battery Storage (3 Batteries), Electrical ircuit Breakers, Trolling Systems - 12/24V Bow Outlet (Additional Stern Outlets on Tillers), Stowable Running Lights, Interior Courtesy Lights, Livewell Lights, Cooler (185's & 175's only), Bilge Pump (1 Manual), Fire Extinguisher, **Grab Handles** 

### **OPTIONAL EQUIPMENT**

Trolling Motor, Graph (Minn Kota, Lowrance, Humminbird) Dual Bubble Windshield (Sport Only), Vinyl Floor — Replaces Carpeting, Extra Seat, Stereo, Cover — Mooring, Captain's Chair, Sport Steering Wheel

#### **COLOR OPTIONS**









ALUMATRAF

**Bow Rod Storage** 

**Tiller Console** 

	185 SPORT/CS	185 TILLER	175 SPORT/CS	175 TILLER	165 SPORT/CS	165 TILLER
LENGTH	18'8" (5.6 m)	18'8" (5.6 m)	17'8" (5.3 m)	17'8" (5.3 m)	16'7" (5 m)	16'7" (5 m)
BEAM	95" (2.41 m)	95" (2.41 m)	95" (2.41 m)	95" (2.41 m)	87" (2.2 m)	87" (2.2 m)
DEPTH: Max./to Floor	43"/23" (1.09 m/.58 m)	43"/23" (1.09 m/.58 m)	43"/23" (1.09 m/.58 m)	43"/23" (1.09 m/.58 m)	35"/23 (.89 m/.58 m)	35"/23 (.89 m/.58 m)
TRANSOM: Width/Height	93'/25" (2.36 m/.63 m)	93'/25" (2.36 m/.63 m)	93'/25" (2.36 m/.63 m	93'/20" (2.36 m/.51 m)	87"/20" (2.2 m/.5 m)	87"/20" (2.2 m/.51 m)
HORSEPOWER: Max.	150 hp (111 kw)	90 hp (67 kw)	150 hp (111 kw)	75 hp (56 kw)	90 hp (67 kw)	70 hp (52kw)
CAPACITY: Max. persons	6/1600 lbs. (6/726 kg)	6/1600 lbs. (6/726 kg)	6/1370 lbs. (6/621 kg)	6/1300 lbs. (6/589 kg)	6/1325 lbs. (6/623 kg)	6/1325 lbs. (6/623 kg)
WEIGHT	1500 lbs. (680 kg)	1300 lbs. (589 kg)	1375 lbs. (624 kg)	1160 lbs. (526 kg)	1040 lbs. (471 kg)	920 lbs. (417 kg)
FUEL CAPACITY	35 gal. (132 L)	35 gal. (132 L)	35 gal. (132 L)	35 gal. (132 L)	19 gal. (71 L)	19 gal. (71 L)
2XB BOW	.160 (4.06 mm)	.160 (4.06 mm)	.160 (4.06 mm)	.160 (4.06 mm)	.145" (3.68 mm)	.145" (3.68 mm)
2XB HULL #	.160 (4.06 mm)	.160 (4.06 mm)	.160 (4.06 mm)	.160 (4.06 mm)	.080" (2.03 mm)	.080" (2.03 mm)
HULL THICKNESS: Side	.080 (2.03 mm)	.080 (2.03 mm)	.080 (2.03 mm)	.080 (2.03 mm)	.065" (1.65 mm)	.065" (1.65 mm)
SEATS*	2	2	2	2	2	2
LIVEWELL: Bow**	22 gal. (83.3 L)	22 gal. (83.3 L)	22 gal. (83.3 L)	22 gal. (83.3 L)	NA	NA
LIVEWELL: Aft***	21 gal. (79 L)	21 gal. (79 L)	21 gal. (79 L)	21 gal. (79L)	19 gal. (71 L)	19 gal. (71 L)
STEERING	hydraulic	NA	hydraulic	NA	no feedback	NA
INSTRUMENTATION	NEW! Multi-function gauge	es – speedometer, tachomete	r, voltmeter, fuel gauge, horn			
STEREO	optional	optional	optional	optional	optional	optional

\* Driver's is stationary with slider, height adjust


<sup>\*\*</sup> Aerated, bait systems, light, remote drains (20" W x 10.5" H x 31.5" L / 55.9 cm x 26.7 cm x 80 cm) \*\*\* Aerated, bait systems, light, remote drains (13" W x 11" H x 36" L / 33 cm x 27.9 cm x 91.4 cm)





165 Tiller

STORAGE ROD STORAGE DRY STORAGE LIVEWELL BATTERY STORAGE 12/24V OUTLET
BOAT MAY BE SHOWN WITH OPTIONAL EQUIPMENT. SEE YOUR DEALER



175 CS

175 Sport

CLASSIC Loads of popular standard equipment, great storage, an open floor plan and superb handling make it easy to see why the Classic is Alumacraft's bestselling boat, year after year.



### STANDARD FEATURES

Rod Storage - Dual 7' Locking Compartments, Battery Storage (2 Batteries), Bow Livewell, Trolling - 12V Bow Outlet, Stowable Running Lights, 2 Interior Courtesy Lights, Livewell Lights, 1 Manual Bilge Pump, Fire Extinguisher, Grab Handles

### **OPTIONAL EQUIPMENT**

Trolling Motor, Graph (Minn Kota, Humminbird, Lowrance), Vinyl Floor, Extra Seat & Pedestal, Mooring Covers

### **COLOR OPTIONS**

Olympic	White







LENGTH

DEPTH: Max./to Floor

HORSEPOWER: Max.

**FUEL CAPACITY** 

LIVEWELL: Bow\*\*

MINN KOTA (standard on PKG)

**DEPTH FINDER** (standard on PKG)

STEERING INSTRUMENTATION

2XB BOW

**AFT HULL** 

SIDE SEATS

CAPACITY: Max. persons

TRANSOM: Width/Height

BEAM

CLASSIC 165 CS PKG	
16'4" (5.0 m)	
82" (2.1 m)	
35"/21" (.89 m/.53 m)	
82"/20" (21 m/51 m)	

02 / 20 (2.1 111) .01 1111
75 hp (56 kw)
5/1280 lbs. (5/580 kg)
895 lbs. (406 kg)
19 gal. (71 L)
.145" (1.65 mm)


.080"
.065"
3
34 gal. (128.7 L)
No feed back


	.065"
	3
	34 gal. (128.7 L)
	No feed back
	speedometer, tachometer, voltmeter, fuel gauge, horn
202	55PD
	Humminhird P-170

**CLASSIC 165 PKG** 16'4" (5.0 m) 82" (2.1 m) 35"/21" (.89 m/.53 m) 82"/20" (2.1 m/.51 m) 60 hp (44 kw) 5/1295 lbs. (5/587 kg) 805 lbs. (365 kg) 19 gal. (71 L) .145" (1.65 mm) .080" .065 34 gal. (128.7 L) NA 55PD **Humminbird P-170** 

\* Driver's is stationary with slider, height adjust

\*\* Aerated, bait systems, light (12" W x 14" H x 54" L / 30.48 cm x 35.56 cm x 137.16 cm)

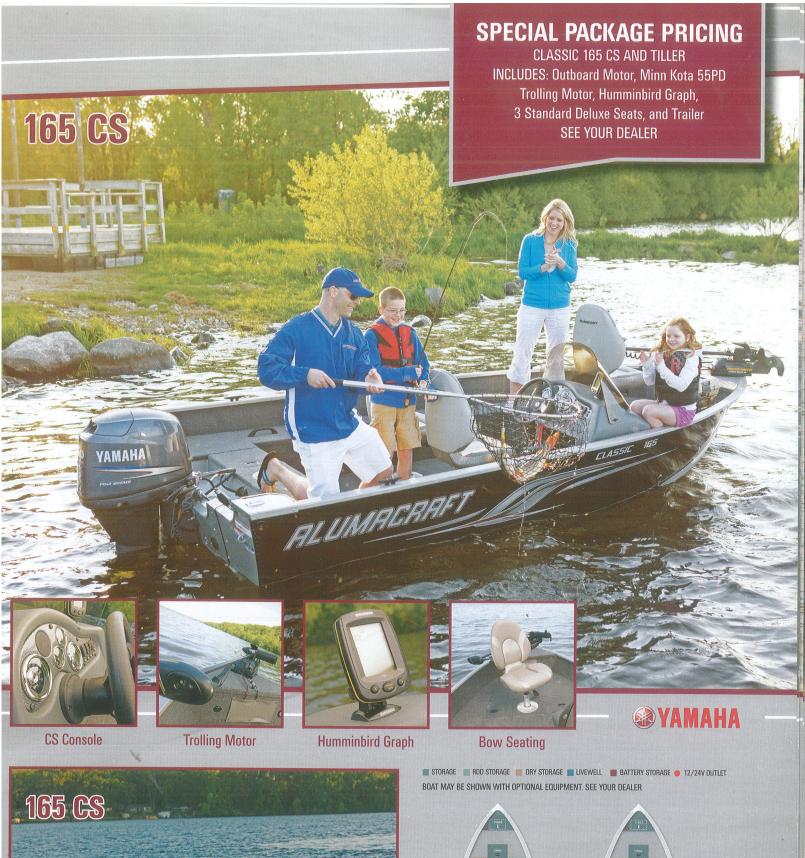

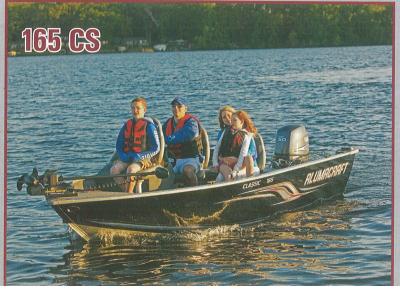



CLASSIC Tiller



CLASSIC CS

### FISHERMAN & LUNKER



### STANDARD FEATURES

Rod Storage - Center Floor up to 7' (Fisherman), Rod Storage - Bow Floor up to 7' (Lunker II), Livewell, Battery Storage (2 Batteries), 12V Trolling Motor System, Electrical Circuit Breakers, Stowable Running Lights, 1 Manual Bilge Pump, **Grab Handles** 

#### **OPTIONAL EQUIPMENT**

Trolling Motor, Windshield (Fisherman CS Models Only), Extra Seat & Pedestal, Graph (Humminbird, Lowrance), Vinyl Floor

### **COLOR OPTIONS**





LENGTH	14'10" (4.5 m)	14 IU (4.5 m)	10 3 (4.9 III)	10 3 (4.9 111)
BEAM	73' (1.85 m)	73' (1.85 m)	73" (1.85 m)	73" (1.85 m)
DEPTH: Max./to floor	32"/20" (.84 m/.55 m)	32"/20" (.84 m/.55 m)	32'/20" (.84 m/.55 m)	32'/20" (.84 m/.55 m)
TRANSOM: Width/Height	67"/20" (1.7 m/.508 m)	67"/20" (1.7 m/.508 m)	67"/20" (1.7 m/.508 m)	67"/20" (1.7 m/.508 m)
HORSEPOWER: Max.	30 hp (19 kw)	25 hp (19 kw)	40 hp (30 kw)	25 hp (19 kw)
CAPACITY: Max. persons	4/925 (4/42 kg)	4/925 (4/42 kg)	5/1118 lbs. (5/507 kg)	5/1118 lbs. (5/507 kg)
WEIGHT	602 lbs. (273 kg)	580 lbs. (263 kg)	622 lbs. (282 kg)	600 lbs. (272 kg)
FUEL CAPACITY	portable	portable	portable	portable
HULL THICKNESS: Bottom/Side	.075"/.065 (1.78 mm/1.65 mm)	.075"/.065 (1.78 mm/1.65 mm)	.070"/.065" (2 mm/1.65 mm)	.070"/.065" (2 mm/1.65 mm)
SEATS*	2	2	2	2
PEDESTALS/SOCKETS	2/4	2/4	13 gal. (49 L)	13 gal. (49 L)
LIVEWELL: Side**	13 gal. (49 L)	13 gal. (49 L)	single cable SAFE-T	NA
CTEEDING	single soble SAFET	NA		

\* Driver's is stationary with slider, height adjust \*\* Aerated, bait systems (9" W x 13" H x 32" L / 22.86 cm x 33 cm x 81.28 cm)

## CANOES and V's & T's



V-14 (20")

14'3" (4.3 m)

68" (1.72 m)

30" (.76 m)

20 hp (14.9 kw)

235 lbs. (107 kg)

split aft

62"/20" (1.58 m/.51 m)

5/1195 lbs. (5/542 kg)

.065"/.065 (1.65 mm/1.65 mm)

V-14 (15")

14'3" (4.3 m)

68" (1.72 m)

30" (.76 m)


20 hp (14.9 kw)

230 lbs. (104 kg)

split aft

62"/15" (1.58 m/.38 m)

5/1015 lbs. (5/460 kg)



MANAGEMENT IN S
n ans

LENGTH

BEAM

WEIGHT

SEATS

**BOW HEIGHT** 

TRANSOM: Width/Height

**CAPACITY:** Max. persons

**HULL THICKNESS:** Bottom/Side

HORSEPOWER: Max.

SEATS: Bench/Bow

	A	A	A
QT 185	CO 17	OT 17	QT 15

V-16 (20")

16'7" (5 m)

70" (1.78 m)

30" (.76 m)

25 hp (19 kw)

285 lbs. (129 kg)

split aft

62"/20" (1.58 m/.51 m)

5/1380 lbs. (5/626 kg)

.065"/.065 (1.65 mm/1.65 mm)

	QT 185	CO 17	QT 17	QT 15
LENGTH	18'5" (5.61 m)	17' (5.18 m)	17' (5.18 m)	15' (4.57 m)
BEAM	37" (.94 m)	37" (.94 m)	36" (.91 m)	36" (.91 m)
DEPTH: Midship	13" (.33 m)	13" (.33 m)	13" (.33 m)	12" (.30 m)
TRANSOM: Width/Height	NA	15" (.51 m)	NA	NA
HORSEPOWER: Max.	NA	4 hp (2.98 m)	NA	NA
CAPACITY: Max. persons	4/800 lbs. (4/363 kg)	4/805 lbs. (4/364 kg)	4/750 lbs. (4/340 kg)	3/652 lbs. (3/296 kg)
WEIGHT	71 lbs. (32 kg)	80 lbs. (36 kg)	64 lbs. (29 kg)	56 lbs. (25 kg)
HULL THICKNESS: Bottom	.040 (1 mm)	.040 (1 mm)	.040 (1 mm)	.040 (1 mm)
KEEL TYPE-CRUISING	.0625 (1.6 mm)	.0625 (1.6 mm)	.0625 (1.6 mm)	.0625 (1.6 mm)
STEM GAUGE	.090 (2.3 mm)	.090 (2.3 mm)	.090 (2.3 mm)	.090 (2.3 mm)
NUMBER OF RIBS	6	5	5	3
CURVED THWARTS	optional	optional	standard	optional
SEATS BENCH TYPE: Forward/Aft	1/1	1/1	1/1	1/1

14' (4.2 m)

61" (1.54 m)

26" (.65 m)

15 hp (11 kw)

202 lbs. (92 kg)

.065"/.065 (1.65 mm/1.65 mm) .060"/.050" (1.52 mm/1.27 mm)

60"/15" (1.52 m/.38 m)

4/825 lbs. (4/374 kg)

12' (3.7 m)

60" (1.52 m)

25" (.64 m)

10 hp (7 kw)

187 lbs. (85 kg)


NA

3/0

60"/15" (1.52 m/.38 m)

3/650 lbs. (3/295 kg)

.060"/.050" (1.52 mm/1.27 mm)

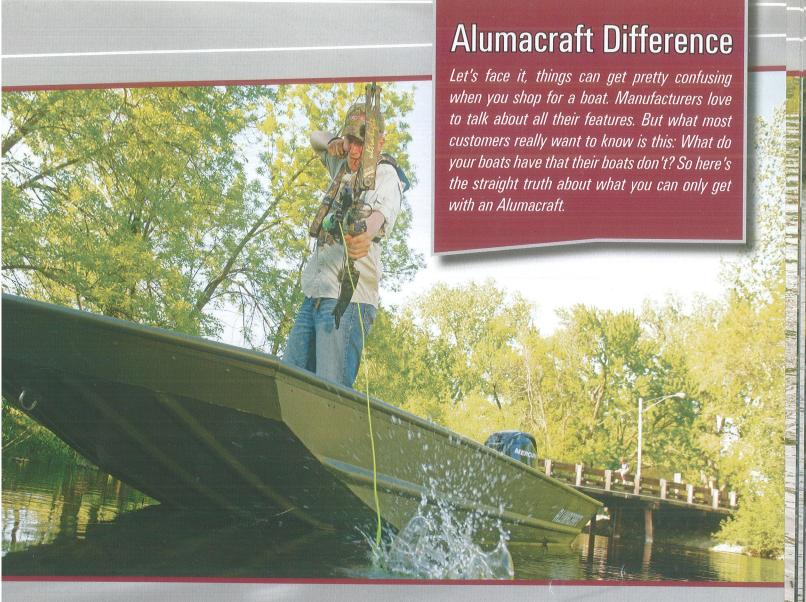



### 1. FULL-LENGTH, ONE-PIECE OVERSIZED RIBS ON OUR RIVETED BOATS

What it means to you: strength and dependability.

Our ribs are 12" on center on our all-welded boats, 15" on center on our riveted boats. The competition uses fewer ribs and spaces them wider, which is a little like building a house out of code. Sure, it costs a bit more to build our boats this way, but we want yours to last.



#### 2. ONE-PIECE HULL CONSTRUCTION

What it means to you: no metal fatigue and a quieter ride.


The competition uses as many as three pieces for their hulls. All that welding creates more margin for error and affects the quality of your ride. Combine our one-piece hull with our oversized ribs, and you know you're getting a superior boat that's both quiet and built to last.



### 3. MORE KEEL BREAKS

What it means to you: a stronger hull. (A keel break is built-in or pressed ribs in your hull.)

At Alumacraft, we build our keels with more pressed ribs than the competition—because more "breaks" means a stronger hull. Combine Alumacraft's seven keel breaks on welded products with our oversized ribs, stringers and onepiece hull construction, and you've got the strongest hull for your money. Period.



#### 4. ALUMINUM TRANSOM CONSTRUCTION

What it means to you: all-welded jons with an all-aluminum transom featuring heavy-welded box channels with .125 aluminum on both sides.

Sure, this isn't something you can see from the outside, but when you ride an Alumacraft, you can rest assured that your motor is sitting on what we believe to be the strongest transom in the business.



### 5. WELDED FLOORS

What it means to you: a quieter, finished floor.

The other guys use rivets on their floors; we weld ours in. The result is not only a quieter floor, but also the peace of mind that you won't pop rivets when you're in the rough stuff. Plus, unlike our competitors, Alumacraft gives you an all-welded jon boat (with floor) that also includes aluminum sides. That's the whole package—and better value.



### 6. RIVETED BOAT TRANSOMS

What it means to you: a more reliable boat.

The outside of a riveted jon boat transom may look the same from boat to boat, but the real difference is on the inside. Some of the competition will only use a 6" board from the top. At Alumacraft, we support our transoms the full heightgiving you the quality and value you expect for your hardearned money.

## PRO PACKAGES Alumacraft's Pro is a tournament-style boat that's well-equipped with tons of storage and raised fishing platforms for a full day of leisure or competition.



STANDARD FEATURES

Lockable Rod Storage (Pro 175 Dual Bow, PF 175 Side), Dual Livewells, Saltwater Resistant System, Navigation & Trim Switch on Bow, 12V Power Point, 12/24V Bow Outlet, Stowable Running Lights, Interior Courtesy Light, Manual Bilge Pump

### OPTIONAL EQUIPMENT

Trolling Motor (Minn Kota), Graph (Lowrance or Humminbird)

### **COLOR OPTIONS**









LENGTH

WEIGHT **FUEL TANK** 

WIDTH: Max. Beam

HORSEPOWER: Max.

**HULL THICKNESS** SEATS\*

PEDESTALS/SOCKETS

**CONSOLE:** Fiberglass with windscreen

LIVEWELLS: Bow\*\* LIVEWELLS: Aft\*\* STEERING

INSTRUMENTATION:

TRANSOM: Width/Height

CAPACITY: Max. Persons

SIDE HEIGHT


PRO 165	PRO 175	PRO 185	PF 175
16'0" (4.88 m)	17'5" (5.31 m)	18′ 5″ (5.62 m)	17'5" (5.31 m)
74"/50" (1.88 m/1.27 m)	84"/56" (2.13 m/1.42 m)	86"/60" (2.18 m/1.52 m)	84"/56" (2.13 m/1.42 m)
21" (0.53 m)	23" (0.58 m)	24" (0.61 m)	23" (0.58 m)
69"/21" (1.75 m/0.53 m)	84"/21" (2.13 m/0.53 m)	86"/21" (2.18 m/0.53 m)	84"/21" (2.13 m/0.53 m)
60 hp (45 kw)	90 hp (67 kw)	115 hp (86 kw)	90 hp (67 kw)
4/1010 lbs. (4/458 kg)	4/1200 lbs. (4/544 kg)	4/1200 lbs. (4/544 kg)	4/1195 lbs. (4/542 kg)
830 lbs. (376 kg)	1075 lbs. (487 kg)	1100 lbs. (498 kg)	1085 lbs. (492 kg)
NA	21 gal. (79.5 L)	21 gal. (79.5 L)	21 gal. (79.5 L)
.102" (2.6 mm)	.102"/.102" (2.6 mm/2.6 mm)	.102"/.102" (2.6 mm/2.6 mm)	.102"/.102" (2.6 mm/2.6 mm
4	5	5	4
2/2	2/2	2/2	2/3
NA	20 gal. each (75.71 L)	20 gal. each (75.71 L)	20 gal. each (75.71 L)
20 gal. (75.71 L)	20 gal. each (75.71 L)	20 gal. each (75.71 L)	20 gal. each (75.71 L)
no feedback	no feedback	no feedback	no feedback
standard	standard	standard	standard
standard**	standard***	standard***	standard***

<sup>\*3</sup> deluxe bucket seats and 2 pedestal seats (PRO); 2 deluxe bucket seats and 2 pedestal seats (PF) \*\*Aerated, remote drain (PRO); aerated (PF)

<sup>\*\*\*</sup>INSTRUMENTATION: Speedometer, tachometer, volt gauge

<sup>\*\*\*\*</sup>INSTRUMENTATION: Speedometer, tachometer, fuel gauge



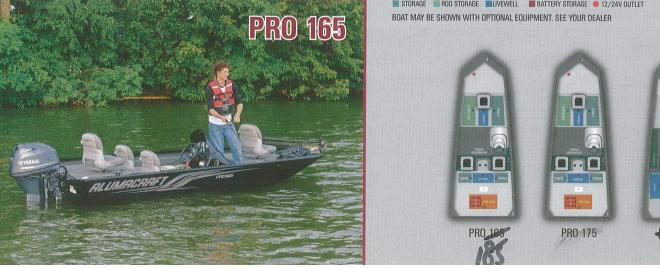

CRAPPIES The Crappies are boat that are ready when you are. Easy to haul, comfortable to ride, and completely hassle-free.



WEIGHT

THICKNESS

LIVEWELL\*

330 lbs. (150 kg)

0.063" (1.6 mm)

5 gal. (18.93 L)

520 lbs. (236 kg)

0.070" (1.78 mm)

10 gal. (37.85 L)

**OPTIONAL EQUIPMENT** 

in Liner (MV Tex Special)

**COLOR OPTIONS** 


Gray (Crappie standard)


Trolling Motor (Minn Kota), Graph (Lowrance or Humminbird), Spray-


Victory Red

Pacic Blue

<sup>\*</sup> Aerated (MV Tex Special); Aerated with seat cushion (Crappie Deluxe); Livewell box (Crappie Jon)

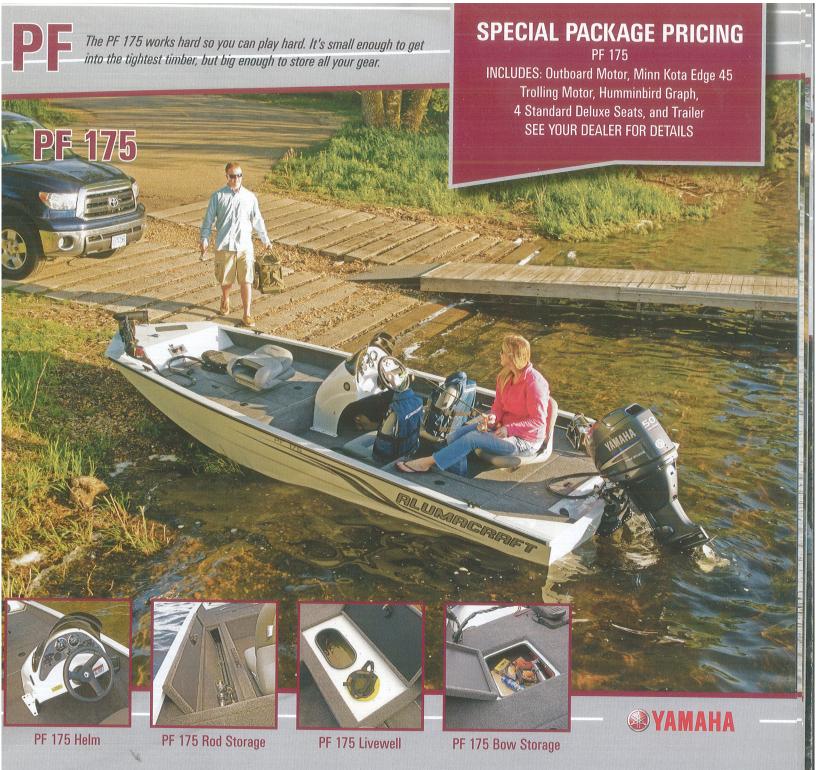

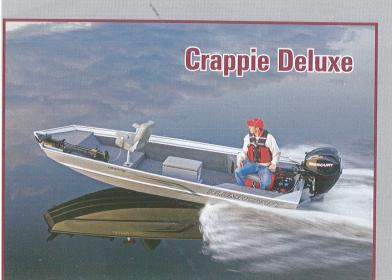




# 18'-20' ALL WELDS

Alumacraft's 18' - 20' All Weld Jons offer solid, no-nonsense comfort, performance and affordability.



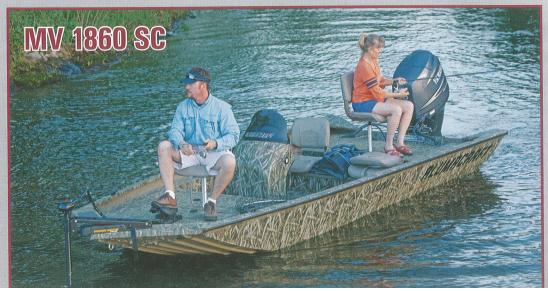




BOAT MAY BE SHOWN WITH OPTIONAL EQUIPMENT. SEE YOUR DEALER



# 15'-17' ALL-WELDS



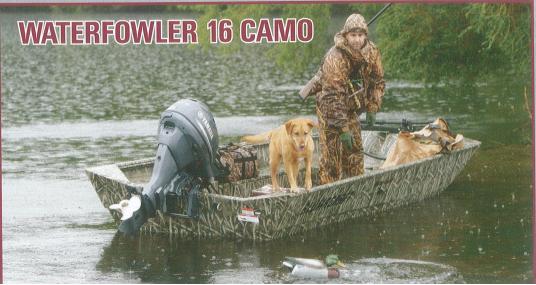



MV 1756 AW SC

MV 1650 AW

MV 1650 AW SC

WATERFOWLER 16

MV 1546 AW

25

MV 1546 AW DD TUNNEL

MV 1546 AW DD

# RIVETED JONS Nor ordinary jon, the V-hull Riveted Jon is known for its toughness, simplicity, durability and performance. Only what you'd expect from a company that's been making high-quality riveted boats for over 60 years.




# SIERRAS



**Optional Side Console** 

**Optional Livewell** 

**Trolling Motor Bracket** 

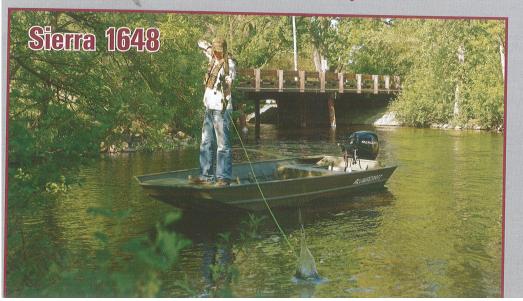








1436 LT

									All.						W
		A WANTER BANTI	TUNELE HATTER AND THE PARTY AN	THE.			all	alal	Settle Thinks	H.C. H. HERRIT	ME CL	H St. HE HEELEN	MES		- Silver
	ME	s and	THE SHAPE	THREE MY TATE AND	is a	M MY THIT HA	A THINE IN THE IN	Shirty, all o	SPECIAL IN THE IN	C. MI	IIIIIIEE. IIII ISGI IAN	asc and	THE CAN	H HELLH	Thinks My 136
	WY TATE AND FO	12112 A	W2012 A	WHILE A	WAST WASTERN	W 2012 h	1980	IR BEIL	WI BED!	"Bally	WI 1880	TH HEED.	THE HIT SEED AND	THE HELD	WHITE THE
	Mil.	Mil	MI.	Mr.	00,04	20'0"	10'0"	18'0"	18'0"	18'0"	18'0"	18'0"	18'0"	18'0"	17'0"
ENGTH	20'0"	20'0"	20'0"	20'0"	20'0"	20'0"	18'0" 60"	60"	60"	60"	60"	60"	60"	60"	56"
COTTOM WIDTH	72"	72"	72"	72"	72"	72"	Property of the Control of the Contr	86"/25"	86"/25"	86"/25"	86"/25"	86"/25"	86"/25"	86"/25"	83"/24"
EAM SIDE HEIGHT	94"/27"	94"/27"	94"/27"	94"/27"	94"/27"	94"/27"	86"/25"	21"	21"	21"	21"	21"	21"	21"	21"
RANSOM HEIGHT (all-aluminum)	21"	21"	21"	21"	21"	21"	21"	21 115 hp	115 hp	115 hp	90 hp	90 hp	50 hp	50 hp	75 hp
MAXIMUM HORSEPOWER	130 hp	130 hp	130 hp	115 hp	60 hp	60 hp	115 hp		1 15 np	110 mp	- 30 lih.		75 hp	75 hp	75 lip
ORSEPOWER (optional side console	MANAGEMENT AND	- 01 1	- 01 1	011	90 hp1	90 hp <sup>1</sup>	- 21 gal	- 21 nol	21 gal.	21 gal.	21 gal.	21 gal.	75 lip	70 mp	21 gal.
UEL TANK	21 gal.	21 gal.	21 gal.	21 gal.	700 lb-	740 lbs	21 gal.	21 gal.	PROPERTY OF THE PROPERTY OF TH	875 lbs.	910 lbs.	920 lbs.	625 lbs.	635 lbs.	805 lbs.
APPROXIMATE WEIGHT	1175 lbs.	1185 lbs.	1135 lbs.	1145 lbs.	730 lbs.	740 lbs.	865 lbs.	875 lbs.	865 lbs.		6/1600 lbs.	6/1600 lbs.	6/1600 lbs.	6/1600 lbs.	5/1300 lbs
	8/2100 lbs.	8/2100 lbs.	8/2100 lbs.	8/2100 lbs.	8/2100 lbs.	8/2100 lbs.	6/1600 lbs.	6/1600 lbs.	6/1600 lbs.	6/1600 lbs.	.102"	.102"	.102"	.102"	.102"
IULL GAUGE	.102"	.102"	.102"	.102"	.102"	.102"	.102"	.102"	.102"	.102"	.1UZ Modified-V	Flat-V Tunnel	Modified-V	Modified-V	Modified-V
HULL TYPE	Modified-V	MV Tunnel	MV Tunnel	Modified-V	Modified-V	MV Tunnel	Modified-V	Flat-V Tunnel	Modified-V	Flat-V Tunnel	Monneuv	Figi-v Tunner	Modified-v 13	13	Woumou .
NUMBER OF RIBS	Ĺ	L	l l	L	15	15	L	L	L	L	3	. L		Opt.	_
SIDE CONSOLE	-	-	-	3	Opt.	Opt.			21000	2.000			Opt.	- Upt.	3
CENTER CONSOLE	3+6RH	3+6RH	3+6RH	-		-	3+6RH	3+6RH	3+6RH	3+6RH	- 2	- 2	- Opt		3
WINDSHIELD	3	3	3	3	Opt.	Opt.	3	3	3	3	3	3	Opt.	Opt.	
INSTRUMENTATION	3 S, T, F	3 S, T, F	3 S, T, F	3 S, T, F	-	-	3 S, T, F	3 S, T, F	3 S, T, F	3 S, T, F	3 S, T, F	3 S, T, F			3 S, T, F
LIVEWELL	3	3	3	3		-	3	3	3	3	3	3	- 2	-	3
STORAGE COMPARTMENTS	2	2	2	3 + rod	2	2	2	2	2	2	3 + rod	3 + rod	2	2	2
DRY STORAGE COMPARTMENTS	-			1				-	-	-	1	1	- 0-4	- 0-4	-
GUN BOX					Opt.	Opt.	-		-	-	-	- 2	. Opt.	Opt.	
SEATS	FF, Cons.	FF, Cons.	Cons.	2			Cons.	Cons.	Cons.	Cons.	2	2	- 6.	- 0-4	-
FISHING SEATS	2	2	2	2	Opt.	Opt.	2	2	2	2	2	2	Opt.	Opt.	2
SEAT PEDESTAL BASES	2 pin	2 pin	1 pin, 1L	2 pin	Opt.	Opt.	1 pin, 1L	1 pin, 1L	1 pin, 1L	1 pin, 1L	2 pin	2 pin	Opt.	Opt.	1 pin, 1
COOLER	3	3		<del>.</del>			Name of the		-	- "	- 6	-	-	-	-
FLOOR	3	3	3	3	Opt.	Opt.	3	3	3	3	3	3	Opt.	Opt.	3
DROP DECK				-					<b>n</b> -		-	-	-	-	-
TROLLING MOTOR, GRAPH	Opt.	Opt. ,	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
TRI-MOTOR HARNESS	3w/TT	3w/TT	3w/TT	3w/TT	Opt.		3w/TT	3w/TT	3w/TT	³ 3w/TT	3w/TT	3w/TT	Opt.	-	3
LIGHTS	3	3	3	3	Opt.1	Opt.1	3	3	3	3	3	3	Opt.1	Opt.1	3
POWER POINTS	1	1	1	1	Opt.	free	1	1	1	1	1	1	Opt.		1
BILGE PUMP	3	3	3	3			3	3	3	3	3	3 1			3
SPRAY-IN FLOOR LINER	Opt.	Opt.	Opt.	Opt.			3	3	Opt.	Opt.	Opt.	Opt.			Opt.
SPONSONS		Opt.	Opt.			Opt.		Opt.	-	Opt.	100 July -	-	-	Opt.	-
PAINT COLOR	Khaki	Khaki	Khaki	Khaki	Khaki	Khaki	White	_ White	Khaki	Khaki	Khaki	Khaki	Khaki	Khaki	Khak
CAMO PAINT	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	NA	NA	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
Orașio France												1 WITH OPTION	AL FLOOR PACKA	GE INSTALLED A	FACTORY (
	.0	, ,	MES, so		/	e /	1	/	/	4/ 3	65/	/ #	4/	/	1
	111111111111111111111111111111111111111	Milde	A HULLIANS	SHE SHE	SHR HE	May MAS	1492	MA	MALI	THE THE PERSON	ALTO ALTO	<b>展器</b> III	1736	10%	/
					/		/	/	14.0"	/	14.0"	14.0"	12.0**	10.0"	
LENGTH	16.0"'	16.0"'	14.0"′	16.0"'	16.0"	14.0"	15.0"	19.0	40"	1º4.U	20"	26"	36"	36"	

									¹ WITH OPTIONAL FLOOR PACKAGE INSTALLED AT FACTORY OF					
WHI FEETS	WHI THER HES	IN THE	16119	GAR HES	June /	HAR /	MA	MARIM	MARINGS	11,25	H261TE	1736	Wife /	
16.0"'	16.0"'	14.0"'	16.0"'	16.0"'	14.0"'	15.0"	14.0"	14.0"	14.0"′	14.0"	14.0"′	12.0**	10.0"	
48"	48"	48"	48"	48"	48"	42"	42"	42"	42"	36"	36"		36"	
70"/21"	70"/21"	70"/21"	70"/21"	70"/21"	70"/21"	62"/20"	62"/20"	62"/20"	62"/20"	55"/19"	55"/19"	55"/19"	55"/19"	
15"/20"	15"/20"	15"/20"	15"/20"	15"/20"	15"/20"	15"	15"	15"	15"	15"	15″	15"	15"	
30 hp	35 hp	25 hp	30 hp	30 hp	25 hp	25 hp	25 hp	25 hp	25 hp	15 hp	15 hp	15 hp	3 hp	
320 lbs.	310 lbs.	250 lbs.	290 lbs.	325 lbs.	285 lbs.	210 lbs.	205 lbs.	210 lbs.	240 lbs.	180 lbs.	135 lbs.	125 lbs.	100 lbs.	
5/1010 lbs.	5/1010 lbs.	5/885 lbs.	5/1010 lbs.	5/1010 lbs.	5/885 lbs.	4/775 lbs.	3/755 lbs.	3/755 lbs.	3/755 lbs.	3/620 lbs.	3/625 lbs.	3/540 lbs.	3/365 lbs.	
.070"	.070"	.070"	.070"	.070"	.070"	.063"	.063"	.063"	.063"	.058"	.053"	.053"	.053"	
Modied-V	Modied-V	Modied-V	Flatbottom	Flatbottom	Flatbottom	Flatbottom	Flatbottom	Flatbottom	Flatbottom	Flatbottom	Flatbottom	Flatbottom	Flatbottom	
9	9	7	9	9	7	8	7	7	1	7	6	5	2	
Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	-		-		
	١_	Opt.	Opt.		Opt.	_	-	3	-	Opt.	Opt. box	-		
			3 w/ storage	_	3 w/ storage	3	3	3		3 w/ storage	3	3	3	
	Opt.		Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	
	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	
	CONTRACTOR ASSESSMENT	DESCRIPTION ASSESSMENT THE	Olive Drab Green	Olive Drab Green	Olive Drab Green	Olive Drab Green	Olive Drab Green	Olive Drab Green	Olive Drab Green	Olive Drab Green	Olive Drab Green	Olive Drab Green	Olive Drab Green	
	STD							_	-			-	_	
	16.0" 48" 70"/21" 15"/20" 30 hp 320 lbs. 5/(1010 lbs	16.0" 16.0"  48" 48"  70"/21" 70"/21"  15"/20" 15"/20"  30 hp 35 hp  320 lbs. 310 lbs.  5/1010 lbs. 5/1010 lbs.  .070" .070"  Modied-V Modied-V  9 9  Opt. Opt.  Opt.  Opt.  - 3 w/ storage -  Opt.  Opt.  Opt.  Opt.  Uive Drab Green  Otive Drab Green	16.0"'         16.0"'         14.0"'           48"         48"         48"           70"/21"         70"/21"         70"/21"           15"/20"         15"/20"         15"/20"           30 hp         35 hp         25 hp           320 lbs.         310 lbs.         250 lbs.           5/1010 lbs.         5/885 lbs.           .070"         .070"         .070"           ModiedV         ModiedV         ModiedV           9         7         0pt.           0pt.         0pt.         0pt.           0pt.         0pt.         0pt.           3 w/ storage         -         3 w/ storage           0pt.         0pt.         0pt.           ET Opt.         0pt.         0pt.           Olive Drab Green         Olive Drab Green         Olive Drab Green	16.0"         16.0"         14.0"         16.0"           48"         48"         48"         48"           70"/21"         70"/21"         70"/21"         70"/21"           15"/20"         15"/20"         15"/20"         15"/20"           30 hp         35 hp         25 hp         30 hp           320 lbs.         310 lbs.         250 lbs.         290 lbs.           5/1010 lbs.         5/1010 lbs.         5/885 lbs.         5/1010 lbs.           .070"         .070"         .070"         .070"         .070"           ModiedV         ModiedV         Hatbottom         9         9         7         9           Opt.         Opt.         Opt.         Opt.         Opt.         Opt.         Opt.           3 w/storage         -         3 w/storage         3 w/storage         3 w/storage           Opt.         Opt.         Opt.         Opt.         Opt.           Topt.         Opt.         Opt.         Opt.         Opt.           Opt.         Opt.         Opt.         Opt.         Opt.           Opt.         Opt.         Opt.         Opt.         Opt.           Opt.         Opt.         Opt.	16.0"         16.0"         14.0"         16.0"         16.0"           48"         48"         48"         48"         48"           70"/21"         70"/21"         70"/21"         70"/21"         70"/21"         70"/21"           15"/20"         15"/20"         15"/20"         15"/20"         15"/20"         15"/20"           30 hp         35 hp         25 hp         30 hp         30 hp         30 hp           320 lbs.         310 lbs.         250 lbs.         290 lbs.         325 lbs.           5/1010 lbs.	16.0"         16.0"         14.0"         16.0"         16.0"         14.0"           48"         48"         48"         48"         48"         48"         48"           70"/21"         70"         70"<	16.0"         16.0"         14.0"         16.0"         16.0"         14.0"         15.0"           48"         48"         48"         48"         48"         42"           70"/21"         70"/21"         70"/21"         70"/21"         70"/21"         70"/21"         62"/20"           15"/20"         15"/	16.0"         16.0"         14.0"         16.0"         14.0"         15.0"         14.0"         15.0"         14.0"           48"         48"         48"         48"         48"         48"         42"         42"           70"/21"         70"/21"         70"/21"         70"/21"         70"/21"         62"/20"         62"/20"           15"/20"         15"/20"         15"/20"         15"/20"         15"/20"         15"/20"         15"         15"           30 hp         35 hp         25 hp         30 hp         30 hp         25 hp <td>  16.0"   16.0"   14.0"   16.0"   16.0"   14.0"   15.0"   14.0"   15.0</td> <td>16.0"         16.0"         14.0"         16.0"         16.0"         14.0"         <th< td=""><td>  16.0"   16.0"   14.0"   16.0"   16.0"   16.0"   16.0"   14.0"   15.0"   14.0</td><td>  18.0"   18.0"   14.0"   16.0"   16.0"   16.0"   14.0"   15.0"   14.0</td><td>  16.0"   16.0"   14.0"   16.0"   16.0"   16.0"   16.0"   16.0"   14.0"   15.0"   14.0</td></th<></td>	16.0"   16.0"   14.0"   16.0"   16.0"   14.0"   15.0"   14.0"   15.0	16.0"         16.0"         14.0"         16.0"         16.0"         14.0" <th< td=""><td>  16.0"   16.0"   14.0"   16.0"   16.0"   16.0"   16.0"   14.0"   15.0"   14.0</td><td>  18.0"   18.0"   14.0"   16.0"   16.0"   16.0"   14.0"   15.0"   14.0</td><td>  16.0"   16.0"   14.0"   16.0"   16.0"   16.0"   16.0"   16.0"   14.0"   15.0"   14.0</td></th<>	16.0"   16.0"   14.0"   16.0"   16.0"   16.0"   16.0"   14.0"   15.0"   14.0	18.0"   18.0"   14.0"   16.0"   16.0"   16.0"   14.0"   15.0"   14.0	16.0"   16.0"   14.0"   16.0"   16.0"   16.0"   16.0"   16.0"   14.0"   15.0"   14.0	



	MINE CO		MELSC		alth.		als.		nes.					with.
IB THE AM	TUNNEL CO.	SC WHITE HAT	WALLES WA	W. Tife M	A THINKE. MY 1850 MA	ig. In the light will	THINE. IN 1850 PM	S. 16 Haller I	MI BOA	d Halland	HATTER WALTERSON	IN ISO	MATTER STATE OF THE STATE OF TH	THIRD
17'0"	17'0"	17'0"	17′0″	17'0"	WH.	18 le	WH I	AB Ide	MI ID	118 1183	WATER	WH Park	WHI FARE	WH FAR
56"	56"	56"	56"	56"	16'0"	16'0"	16′0″	16'0"	16'0"	16'0"	16'0"	15'0"	15'0"	15'0"
83"/24"	83"/24"	83"/24"	83"/24"	83"/24"	50"	50"	50"	50"	50"	50"	50"	46"	46	46"
21"	21"	21"	21"	21"	74"/22"	74"/22"	74"/22"	74"/22"	74"/22"	74"/22"	74"/22"	65"/20"	65"/20"	65"/20"
75 hp	75 hp	75 hp	50 hp	50 hp		21"	21"	21"	21"	21"	21"	15"	15"	15"
_		70 np	75 hp	75 hp	60 hp	60 hp	60 hp	60 hp	40 hp	40 hp	40 hp	25 hp	25 hp	25 hp
21 gal.	21 gal.	21 gal.		- 75 lib		-		-	60 hp	60 hp	-	25 hp	25 hp	25 hp
815 lbs.	895 lbs.	905 lbs.	575 lbs.	585 lbs.	- CEE IL-		-					-		
5/1300 lbs.	5/1300 lbs.	5/1300 lbs.	5/1300 lbs.	5/1300 lbs.	655 lbs.	665 lbs.	720 lbs.	730 lbs.	470 lbs.	475 lbs.	555 lbs.	320 lbs	325 lbs.	320 lbs.
.102"	.102"	.102"	.102"	.102"	4/1010 lbs. .102"	4/1010 lbs.	4/1010 lbs.	4/1010 lbs.	4/1010 lbs.	4/1010 lbs.	4/1010 lbs.	3/719 lbs.	3/719 lbs.	3/719 lbs.
Flat-V tunnel	Modified-V	Flat-V tunnel	Modified-V	Modified-V		.102"	.102"	.102"	.102"	.102"	.102"	.080*	.080"	.080"
I.	Ĺ	1 I	13	13	Flat-V tunnel	Modified-V	Modified-V	Flat-V tunnel	Modified-V	Flat-V tunnel	Modified-V	Modified-V	Modified-V tunnel	Modified-V
	3	3	Opt.	Opt.	L	L	L	1	11	11	L	11	11	11
3			- -	- -	3	-	3	3	Opt.	Opt.	- 1	Opt.	Opt.	Opt.
3	3	3	Opt.	Opt.		3	-		-		-	-	4	
3 S, T, F	3 S, T, F	3 S, T, F	- -	υμι. 	3	3	3	3	Opt,	Opt.	- 1	-		1111-111
3	3	3			3 S, T, V	3 S, T, V	3 S, T, V	3 S, T, V						
2	3 + rod	3 + rod	2	2	3	3	3	3	-	-				
_	1	1	-	_	2	2	3	3	2	2	1	1	1	1
			Opt.	Opt.		-		1	- 1	-	-			
	2	2		орг. —			-		Opt.	Opt.	1	Opt.	Opt.	Opt.
2	2	2	Opt.	Opt.	-	-	2	2	-	-				-
1 pin, 1L	2 pin	2 pin	Opt.	Opt.	1 = 11	2 ,	2	2	-		7.3			-
		_	-	opt.	1 pin, 1L	1 pin, 1L	2 pin	2 pin	Opt.	Opt.	1 pin	1 pin	1 pin	Opt.
3	3	3	Opt.	Opt.	-	-	-	-	-	-	-16			-
- 1			орс. _	орг. —	3	3	3	3	Std.	Std.	3	Opt.	Opt.	Opt.
Opt.	Opt.	Opt.	Opt.	Opt.	 0-4	-	-		-	-	3	3	3	-
3	3	3	Opt.	- -	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.
3	3	3	Opt. <sup>1</sup>	Opt,1	312V 3	312V	312V	312V	Opt.	Opt.	312V			-
1	1	1	Opt.	- -	1	3	3	3	Орт.	Opt.	3	_		
3	3	3	-	_	3	1	1 -	1	Opt.	Opt.	1	- ,		- 4
Opt.	Opt.	Opt.				3	3	3	-	-	3	- 1		-
Opt.	<b>-</b>	- Opt.		Opt.	Opt.	Opt.	Opt.	Opt.	-		- 1			-
Khaki	Khaki	Khaki	Khaki	Khaki	- Vhali	Opt.	-			Opt.		- 4		1
Opt.	Opt.	Opt.	Opt.	Opt.	Khaki	Khaki	Khaki	Khaki	Khaki	Khaki	Khaki	Khaki	Khaki	Khaki
			opu.	opt.	Opt.	Opt.	Opt.	Орт.	Opt.	Opt.	Opt.	Opt.	Opt.	Opt.

WITH OPTIONAL FLOOR PACKAGE INSTALLED AT FACTORY ONLY




## JON BOAT SPECS



PHOTOS MAY SHOW OPTIONAL EQUIPMENT. INFORMATION IS SUBJECT TO CHANGE.

SEE YOUR DEALER FOR CURRENT SPECIFICATIONS AND INFORMATION.

"TUNNEL HULLS ARE NOT DESIGNED FOR JET OUTBOARD USE.

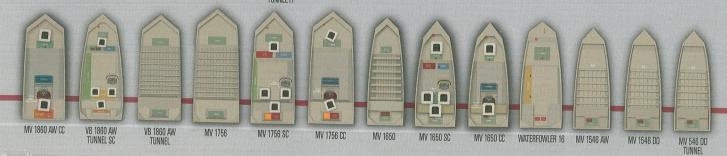

29

# **BOAT OPTIONS**



MINN KOTA TROLLING MOTORS

NGT CONTRACTOR OF THE STATE OF



HUMMINBIRD / LOWRANCE GRAPHS



SPORT STEERING WHEEL



AIR RIDE PEDESTALS



COVER (SNAP COVER ALSO AVAILABLE)



HIGH RISE BIMINI TOP




BIMINI TOP & ENCLOSURE (ONLY FOR USE WHEN BOAT IS AT REST, ENGINE OFF)



VINYL FLOOR



BOW ROD STORAGE (TROPHY'S)



STEREO



**BOW CUSHIONS** 



**PRO SEAT** 



SPRAY-IN LINER



SPONSONS



CAMO PAINT



CAPTAIN'S CHAIR